



EN 60598-1	230V / 50Hz	IP 40	IK 06	⊕	▽	960°C	CE	RoHS	18W / 36W / 58W
------------	-------------	-------	-------	---	---	-------	----	------	-----------------

Domeniul de utilizare: Iluminatul general de interior

Descriere:

Corp: Armătură și șină din tablă de oțel vopsită cu pulbere

Dispersor: Rotund, extrudat din PMMA transparent prevăzut cu o structură prismatică

Variante: Pot fi echipate și cu întrerupător (†).

La cerere poate fi echipat cu balast electronic reglabil-HF-R, aparataj pentru iluminat de siguranță (cu excepția variantei de putere 118).

Montaj: Aparent

Sursa: Tub fluorescent (T8) și tuburi cu LED

Dulie: G13

Standard: SR EN 60598-1

Application: General indoor lighting

Description:

Body: Steel sheet body and rail, painted with powder

Diffuser: Round, transparent extruded PMMA, with a prismatic structure

Variants: May be fitted with a switch (†).

On request may be fitted with electronic dimmable ballast HF-R and emergency lighting kit (except for the 118).

Mounting: Visible


Source: Tubular fluorescent lamp (T8) and tubular LED lamp

Socket: G13

Standard: SR EN 60598-1





FIA-11 Dr cu întrerupător/ with switch



pg.285

FIA-11-118 Dr; 136 Dr; 158 Dr

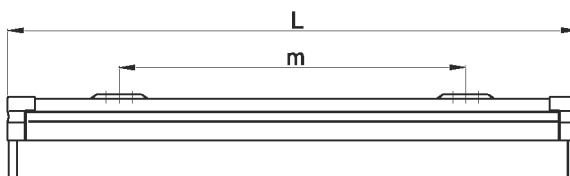

Tip/Type	Cod produs/ Product code	Factor de putere/ Power factor	Dimensiuni/Dimensions [mm]				Masa/ Weight [kg]	Lampa/ Lamp
			L	m	l	h		
1x18W Dr	21131180	0.50	617	455	50.7	85		
1x18W Dr HF-S	21131299	>0.96	617	455	50.7	85		
1x18W Dr HF-P	21131228	>0.96	617	455	50.7	85		
1x36W Dr	21141180	min. 92	1227	900	50.7	85		
1x36W Dr HF-S	21141230	>0.96	1227	900	50.7	85		
1x36W Dr HF-P	21141317	>0.96	1227	900	50.7	85		
1x58W Dr	21151180	min. 0.92	1527	1200	50.7	85		
1x58W Dr HF-S	21151229	>0.96	1527	1200	50.7	85		
1x58W Dr HF-P	21151301	>0.96	1527	1200	50.7	85		
1x18W î, Dr	21131222	0.50	617	455	50.7	85		
1x36W î, Dr	21141222	min. 0.92	1227	900	50.7	85		
1x58W î, Dr	21151222	min. 0.92	1527	1200	50.7	85		

*Codurile pentru produse echipate cu tuburi LED se regăsesc la pg. 253 / The product code for equipping with LED tube to be found on pg. 253