



Brilliantline Dichroic

Brilliantline Dichroic 35W GU4 12V MR11 10D 1CT

Low-voltage, xenon gas-filled halogen burner with axial filament optically positioned in a glass reflector

Product data

• General Characteristics

Philips Code	14626
ANSI Code Halogen	FTE
Cap-Base	GU4
Bulb	MR11 [MR 11inch/35mm]
Bulb Finish	Clear
Burning Position	any [Any/Universal]
Life to 50% failures	4000 hr
Rated Lifetime (hours)	2000 hr
Rated Lifetime (years)	2 an

• Light Technical Characteristics

Beam Angle	10 D
Technical Beam Angle	10 D
Luminous Intensity	7000 (max) cd
Colour Rendering Index	100 Ra8
Colour Temperature	3000 K
Colour Temperature Technical	3000 K

• Electrical Characteristics

Lamp Wattage	35 W
Technical Lamp Power	35.0 W
Voltage	12 V
Lamp Current	2.9 A
Dimmable	yes

• Environmental Characteristics

Energy Efficiency Label (EEL)	-
Mercury (Hg) Content	0.0 mg

• Luminaire Design Requirements

Cap-Base Temperature	350 (max) C
Bulb Temperature	300 (max) C

• Product Dimensions

Overall Length C	40 (max) mm
Diameter D	35.3 (max) mm

• Product Data

Order code	425430 60
Full product code	871150042543060
Full product name	Brilliantline Dichroic 35W GU4 12V MR11 10D 1CT
Order product name	Brilliantline Dichroic 35W GU4 12V MR11 10D 1CT
Pieces per pack	1
Packing configuration	10X5F
Packs per outerbox	50
Bar code on pack - EAN1	8711500425430
Bar code on intermediate packing - EAN2	8711500425447
Bar code on outerbox - EAN3	8711500425454
Logistic code(s) - 12NC	924051417102


ILCOS code

HRGS-35-12-GU4-35/10

Net weight per piece


14.100 gr

Dimensional drawing

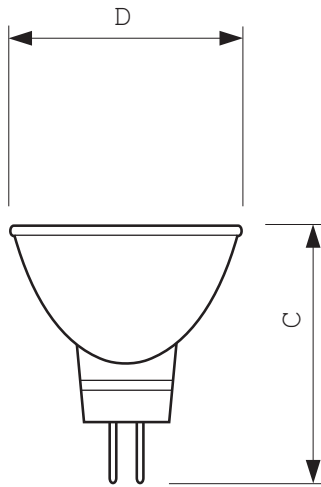

GU4, MR11

Product	C (Max)	D (Max)
DICHRO Pro 14626 35W GU4 12V MR11 10D	40	35.3



GU4



© 2012 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2012, August 4
data subject to change