

Softone ESaver Candle

Softone Candle 12W WW E14 220-240V 1PF

Elegant Energy saving lamp with decorative comfort & design, allows easy replacement of most candle shape incandescent lamp.



Product data

• General Characteristics

Cap-Base	E14
Bulb	B45 [B 45mm]
Nominal Lifetime	10000 hr
Rated Lifetime (hours)	10000 hr
Rated Lifetime (years)	5 an

• Light Technical Characteristics

Color Code	827 [CCT of 2700K]
Color Rendering Index	81 (min), 82 (nom) Ra8
Color Designation (text)	Warm White
Color Temperature	2700 K
Color Temperature Technical	2700 K
Luminous flux lamp	610 Lm
Rated Luminous Flux	610 Lm
Luminous Efficacy Lamp	51 Lm/W
Lumen Maintenance 2000h	83 %
Lumen Maintenance 6000h	70 %
LLMF - end nominal lifetime	65 %
Chromaticity Coordinate X	463 -
Chromaticity Coordinate Y	420 -

• Electrical Characteristics

Rated Wattage	12.0 W
---------------	--------

Lamp Wattage	12 W
Power Factor	0.6 -
Voltage	220-240 V
Lamp Current mA	80 mA
Line Frequency	50/60 Hz
Dimmable	No
Wattage Equivalent	52 W
Starting Time	1.0 s
Warm-up Time to 60% Light Outp	10 (min), 100 (max) s

• Environmental Characteristics

Energy Efficiency Label (EEL)	A
Mercury (Hg) Content	1.5 (nom), 2.0 (max) mg
Energy consumption kWh/1000h	12 kWh

• Measuring Conditions

Switching cycle	30000X
-----------------	--------

• Product Dimensions

Overall Length C	126.0 (max) mm
Diameter D	46.5 (max) mm
Width F	43 (max) mm

• Product Data

Order code	680956 00
Full product code	871829168095600
Full product name	Softone Candle 12W WW E14 220-240V 1PF

PHILIPS

Softone ESaver Candle

Order product name Softone Candle 12W WW E14
220-240V 1PF/6
Pieces per pack 1
Packing configuration 6
Packs per outerbox 6
Bar code on pack -
EAN1 8718291680956

Bar code on
outerbox - EAN3 8718291680963
Logistic code(s) -
12NC 929689139501
Net weight per piece 0.048 kg



Warnings and Safety

- Breaking a lamp is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a closed plastic

bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

- Compact fluorescent lamps have to be treated as special waste, they must be taken to your local waste facilities for recycling. The European Lighting Industry has set up an infrastructure, capable of recycling mercury, other metals, glass etc.

Dimensional drawing

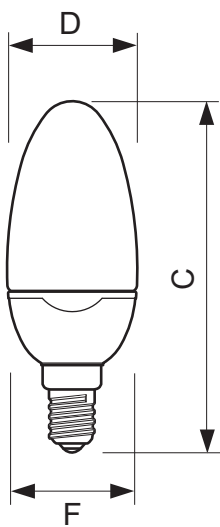

E14

Softone Candle 12W WW E14 220-240V 1PF

Product	C (Max)	D (Max)	F (Max)
Candle 12W/827 E14 220-240V 50/60Hz	126.0	46.5	43



© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, February 7
data subject to change