

MASTER TL5 Circular

MASTER TL5 Circular 55W/840 1CT

16 mm tube diameter circular fluorescent lamps with a choice of various diameters



Product data

• General Characteristics

Cap-Base	2GX13
Bulb	C-T5 [C-T 16 mm]
Life to 10% fail	8000 hr
Preheat EL,3h	
Life to 50% fail	12000 hr
Preheat EL,3h	
LSF HF Preheat	99 %
2000h Rated,3h	
LSF HF Preheat	99 %
4000h Rated,3h	
LSF HF Preheat	96 %
6000h Rated,3h	
LSF HF Preheat	89 %
8000h Rated,3h	
LSF HF Preheat	50 %
12000h Rated,3h	
LSF HF Preheat	10 %
16000h Rated,3h	
LSF HF Preheat	1 %
20000h Rated,3h	

• Light Technical Characteristics

Colour Code	840 [CCT of 4000K]
Colour Rendering Index	80 (min), 85 (nom), 85 (max) Ra8
Colour Designation	Cool White
Colour Temperature	4000 K
Luminous Flux EL	4200 Lm
25°C, Rated	
Luminous Flux EL	4200 Lm
25°C, Nominal	
Lum Efficacy Rated	76 Lm/W
HF 25°C	
LLMF HF 2000h	91 %
Rated	

LLMF HF 4000h	87 %
Rated	
LLMF HF 6000h	84 %
Rated	
LLMF HF 8000h	81 %
Rated	
LLMF HF 12000h	77 %
Rated	
LLMF HF 16000h	74 %
Rated	
LLMF HF 20000h	72 %
Rated	
Design Temperature	35 C
Chromaticity Coordinate X	380 -
Chromaticity Coordinate Y	380 -

• Electrical Characteristics

Lamp Wattage	55 W
Lamp Wattage EL	55.0 W
25°C, Rated	
Lamp Wattage EL	55 W
25°C, Nominal	
Lamp Voltage EL	101 V
25°C	
Lamp Current EL	0.550 A
25°C	
Dimmable	yes

• Environmental Characteristics

Energy Efficiency Label (EEL)	A
Mercury (Hg) Content	2.5 mg

PHILIPS

MASTER TL5 Circular

Energy consumption kWh/1000h 61 kWh

• **Measuring Conditions**

Calibration Current 0.550 A
 HF Generator Rated Voltage 202 V
 Resistor 185 ohm

• **Product Dimensions**

Diameter D 14 (min), 18 (max) mm
 Overall Width E 293 (min), 305 (max) mm
 Inner Width I 260 (min), 272 (max) mm

• **Product Data**

Order code 642516 25


Full product code 871150064251625
 Full product name MASTER TL5 Circular 55W/840 1CT
 Order product name MASTER TL5 Circular 55W/840 1CT/10
 Pieces per pack 1
 Packing configuration 10
 Packs per outerbox 10
 Bar code on pack - EAN1 8711500642516
 Bar code on outerbox - EAN3 8711500642523
 Logistic code(s) - 12NC 927965784013
 ILCOS code FSCH-55/40/1B-L/P-2GX13-16
 Net weight per piece 77.000 gr

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and


remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing

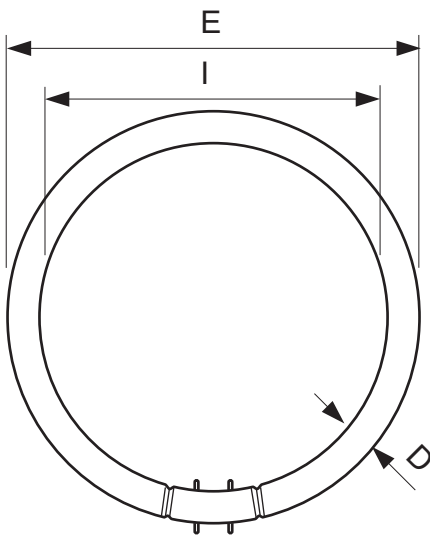



MASTER TL5 Circular 55W/840 1CT

Product	D (Min)	D (Max)	E (Min)	E (Max)	I (Min)	I (Max)
TL5-C 55W/840	14	18	293	305	260	272



2GX13

Photometric data

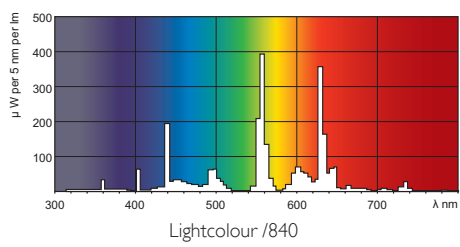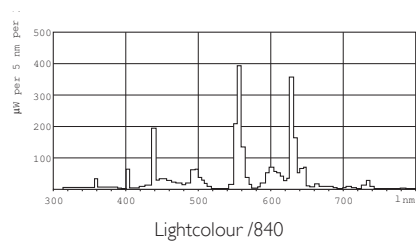

© 2015 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, July 27
data subject to change